

2023  
**CATALOGUE**  
[www.focusonled.com](http://www.focusonled.com)

**FOCUSONLED**®

# Product Model Rules

## L 01 1200 – 40 CO – N A

Version: A,B,C,D,L...

CCT: W(3000K),N(4000K),  
D(5000K),C(6500K)

Function: CO(Normal),DL(Dimmable),  
MW(Microwave),EM(Emergency),  
MY(Microwave and Emergency),IR(Infra-red)

Power: 120(120W),80(80W),65(65W),50(50W),  
40(40W),30(30W),20(20W),15(15W)

Size: 2400(2400mm),1800(1800mm),1500(1500mm),1200(1200mm),  
0900(900mm),0600(600mm) etc.

Series: 01(LED Tri-proof Light ),02(LED Linear Light ),07(MINI Tri-proof Light)  
09(Tubular Tri-proof Light),10(Simple Linear Light) etc.

Type: L(Line Light)


PS : L011200-40CO-NA

Line lamp,LED Tri-proof Light,1200mm,40W,Normal,4000K,Version A.



## Features

- High light efficiency up to 160Lm/w
- IP66/IK10
- DALI, Sensor, Emergency, Linkable optional
- 5G2.5 cable available
- Suspension & Rotation & Ceiling mounting
- Blue, Silver, Green, Red ring optional
- CCT Turnable

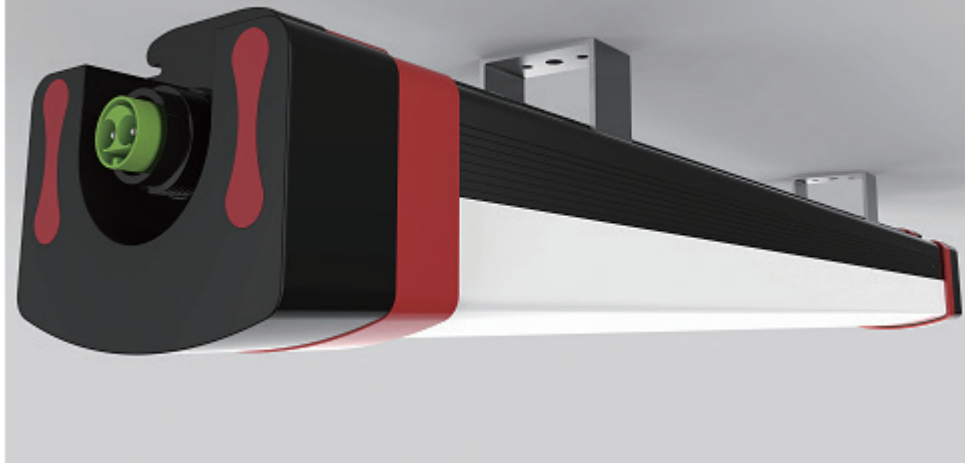

Model NO.	Size	Power	Lumens
L012400-80CO	2400mm	80W	12800
L011500-60CO	1500mm	60W	9600
L011500-50CO	1500mm	50W	8000
L011200-40CO	1200mm	40W	6400
L010900-30CO	900mm	30W	4800
L010600-20CO	600mm	20W	3200


AC input	220-240V/100-277V 50/60HZ
Light source	2835 SDCM<5(SDCM<3 optional)
CRI	80/90/95
CCT	2700K/3000K/4000K/5000K/6500K
Light efficiency	140Lm/w, 160Lm/w
Beam angle	120°
L70B10/L70B50	@ta 25°C: 72000H/81000H
Size	W84mm*H71mm





## Features

- High light efficiency up to 160Lm/w
- IP65/IK10
- DALI, Sensor, Emergency, Linkable optional
- 5G1.5 cable available
- Suspension & Rotation & Ceiling mounting

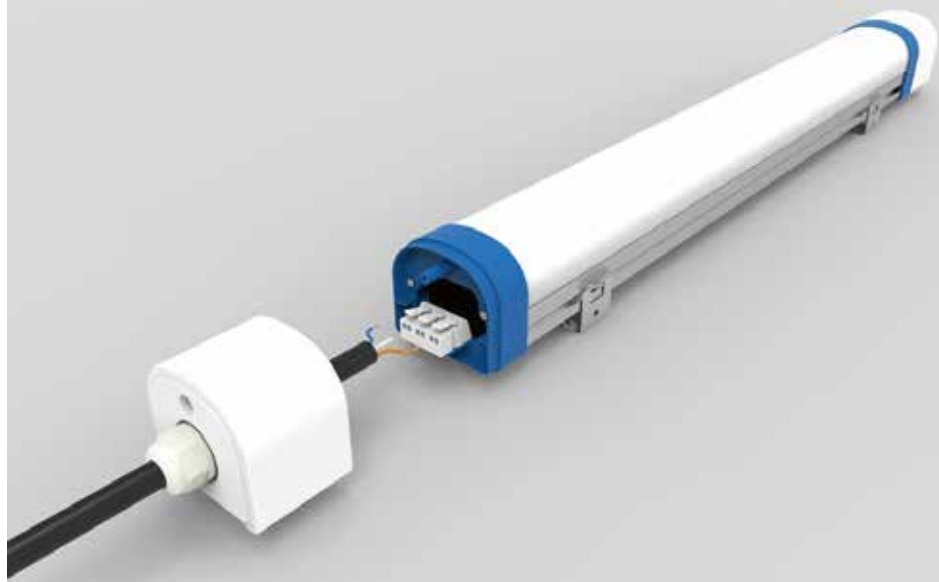

Model NO.	Size	Power	Lumens
L071800-80C0	1800mm	80W	12800
L071500-60C0	1500mm	60W	9600
L071500-50C0	1500mm	50W	8000
L071200-40C0	1200mm	40W	6400
L070900-30C0	900mm	30W	4800
L070600-20C0	600mm	20W	3600


AC input	220-240V/100-277V 50/60HZ
Light source	2835 SDCM<5(SDCM<3 optional)
CRI	80/90/95
CCT	2700K/3000K/4000K/5000K/6500K
Light efficiency	140Lm/w, 160Lm/w
Beam angle	120°
L70B10/L70B50	@ta 25° C: 72000H/81000H
Size	W72mm*H64mm





## Features

- High light efficiency up to 160Lm/w
- IP66/IK10
- DALI, Sensor, Emergency, Linkable option
- 5G1.5 cable available
- Suspension & Ceiling mounting
- Blue, Silver, Green, Red ring optional

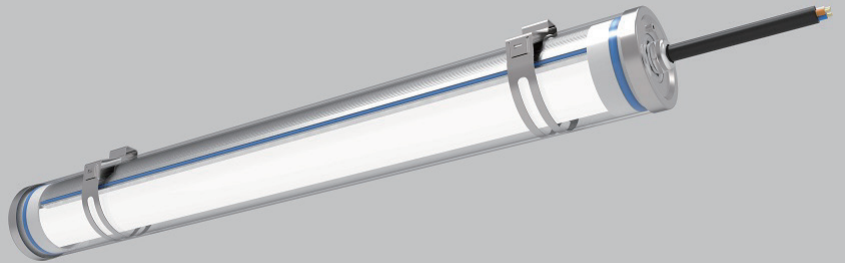

Model NO.	Size	Power	Lumens
L092400-80CO	2400mm	80W	12800
L091500-60CO	1500mm	60W	9600
L091500-50CO	1500mm	50W	8000
L091200-40CO	1200mm	40W	6400
L090900-30CO	900mm	30W	4800
L090600-20CO	600mm	20W	3600


AC input	220-240V/100-277V 50/60HZ
Light source	2835 SDCM<5(SDCM<3 optional)
CRI	80/90/95
CCT	2700K/3000K/4000K/5000K/6500K
Light efficiency	140Lm/w, 160Lm/w
Beam angle	120°
L70B10/L70B50	@ta 25°C: 72000H/81000H
Size	W70mm*H70mm





## Features

- IP54/IK10
- DALI, Sensor, Emergency, Linkable optional
- Suspension & Rotation & Ceiling mounting
- Black, Silver and White Body optional
- CCT Turnable

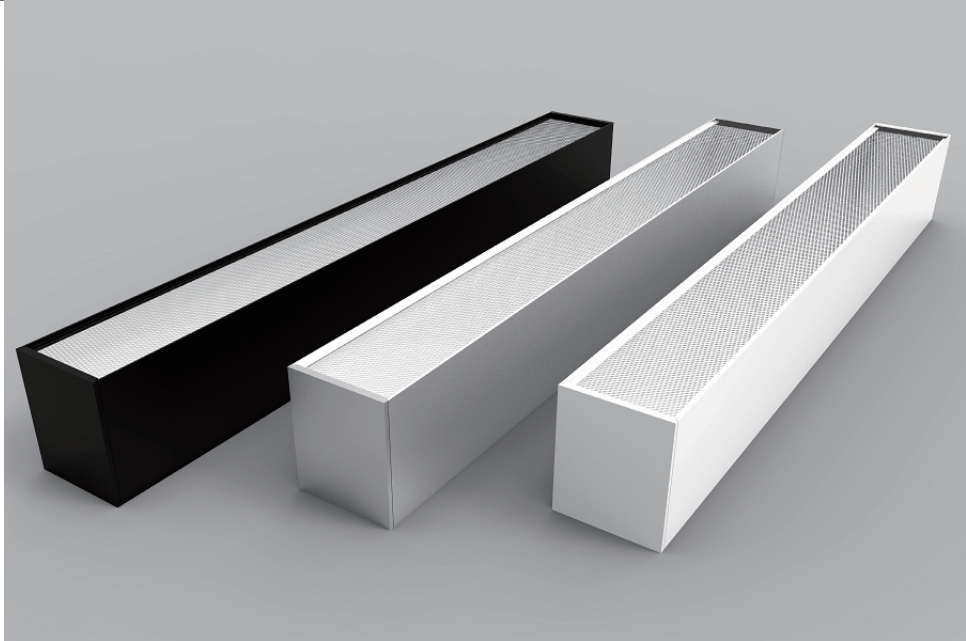


Model NO.	Size	Power	Lumens
L022400-80CO	2400mm	80W	9600
L021500-60CO	1500mm	60W	7200
L021500-50CO	1500mm	50W	6000
L021200-40CO	1200mm	40W	4800
L020900-30CO	900mm	30W	3600
L020600-20CO	600mm	20W	2400

AC input	220-240V/100-277V 50/60HZ
Light source	2835 SDCM<5(SDCM<3 optional)
CRI	80/90/95
CCT	2700K/3000K/4000K/5000K/6500K
Light efficiency	100Lm/w, 120Lm/w
Beam angle	120°
L70B10/L70B50	@ta 25°C: 72000H/81000H
Size	W68mm*H90mm



## Features


- High light efficiency up to 160Lm/w
- IP20/IK08
- DALI, Sensor, Emergency, Linkable optional
- 5G2.5 cable available
- Suspension & Ceiling mounting
- CCT Turnable

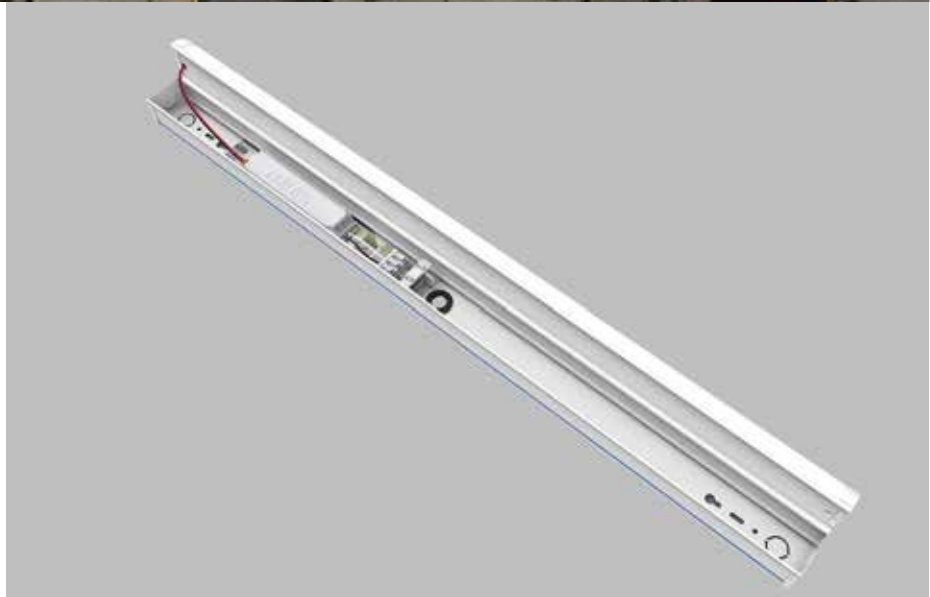

Model NO.	Size	Power	Lumens
L101800-80C0	1800mm	80W	12800
L101500-60C0	1500mm	60W	9600
L101500-50C0	1500mm	50W	8000
L101200-40C0	1200mm	40W	6400
L100900-30C0	900mm	30W	4800
L100600-20C0	600mm	20W	3600

AC input	220-240V/100-277V 50/60HZ
Light source	2835 SDCM<5(SDCM<3 optional)
CRI	80/90/95
CCT	2700K/3000K/4000K/5000K/6500K
Light efficiency	140Lm/w, 160Lm/w
Beam angle	120°
L70B10/L70B50	@ta 25° C: 72000H/81000H
Size	W58mm*H76mm



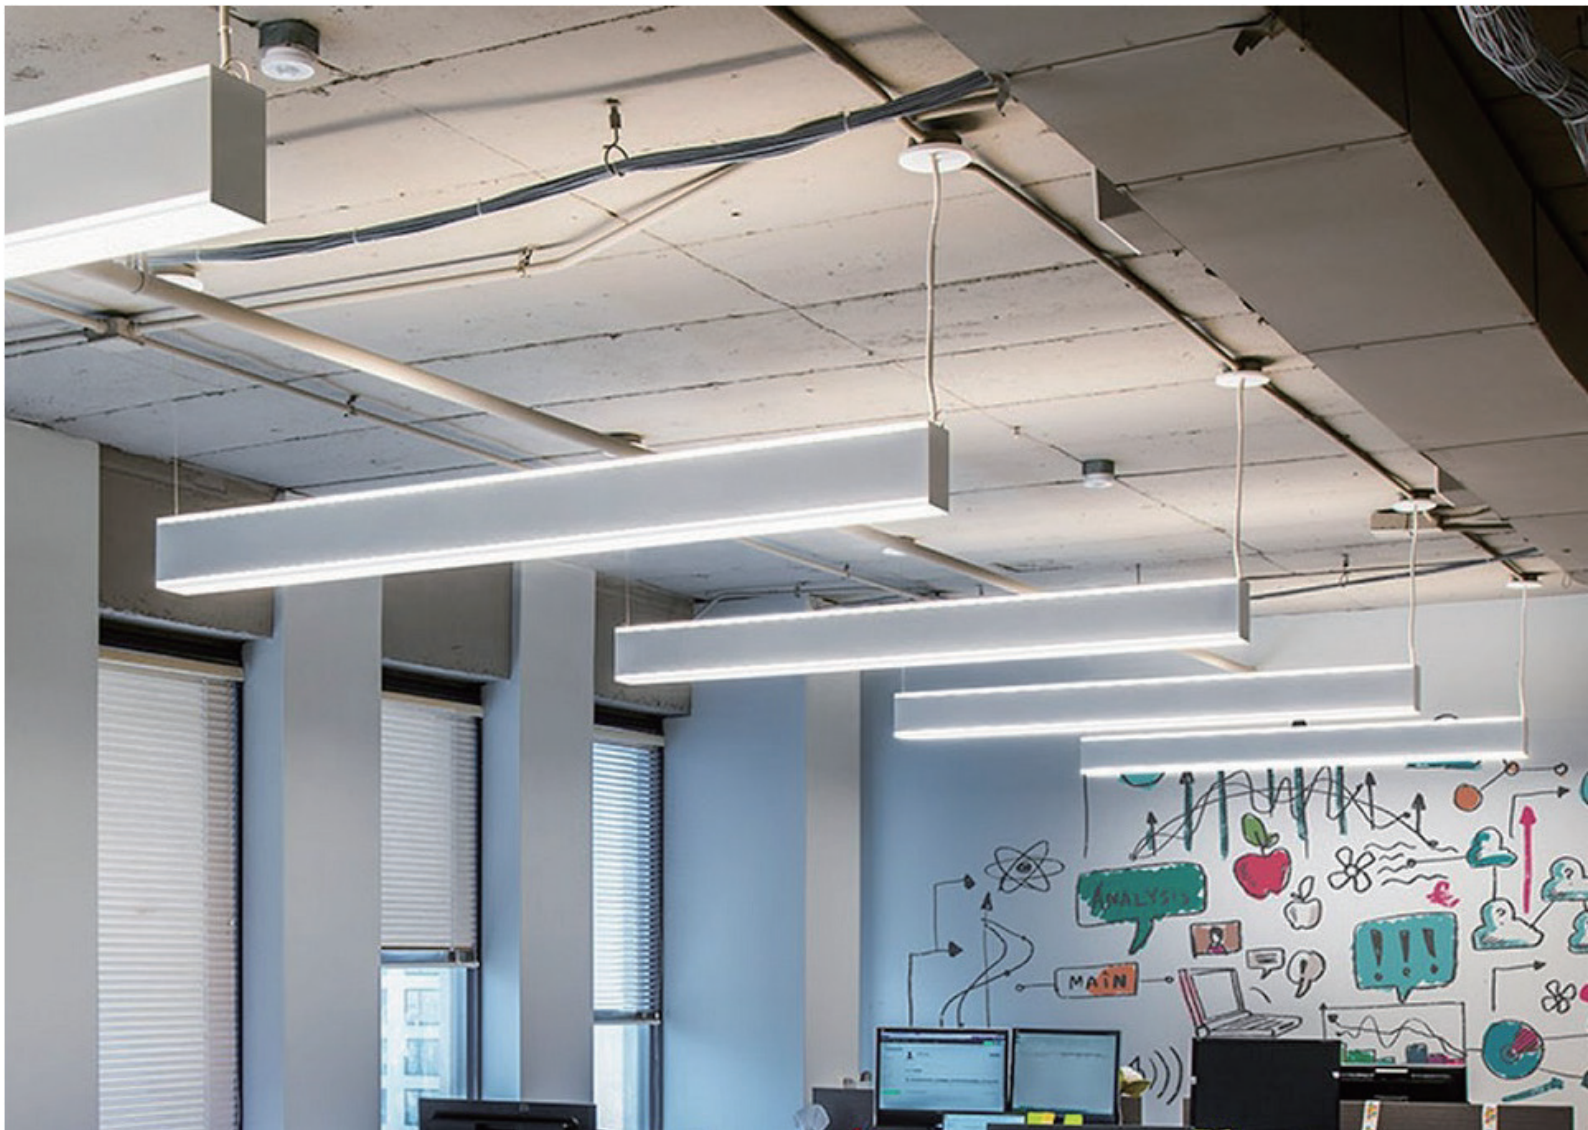

## Features

- IP40/IK10
- 20% up and 80% down
- Suspension
- Black, Silver and White Body optional



Model NO.	Size	Power	Lumens
L082400-80CO	2400mm	80W	9600
L081500-60CO	1500mm	60W	7200
L081500-50CO	1500mm	50W	6000
L081200-40CO	1200mm	40W	4800
L080900-30CO	900mm	30W	3600
L080600-20CO	600mm	20W	2400

AC input	220-240V/100-277V 50/60HZ
Light source	2835 SDCM<5(SDCM<3 optional)
CRI	80/90/95
CCT	2700K/3000K/4000K/5000K/6500K
Light efficiency	120Lm/w, 140Lm/w
Beam angle	120°
L70B10/L70B50	@ta 25°C: 72000H/81000H
Size	W70mm*H90mm





## RGB Lighting Fixture

- IP65
- Wall mounting
- Single Color or RGB
- Linkable and System control
- AC and DC Input optional



Model NO.	Size	Power
W011000-48CO	1000mm	48W
W011000-36CO	1000mm	36W
W011000-24CO	1000mm	24W
W010500-24CO	500mm	24W
W010500-12CO	500mm	12W

AC input	220-240V/100-277V 50/60HZ
DC Input	DC24V
Color	Red/Green/Blue/Amber/Yellow/White
Light efficiency	100Lm/w
Size	W65mm*H70mm



## Features

- High light efficiency up to 160Lm/w
- IP20
- DALI, Sensor, Emergency, Linkable optional
- 5G2.5 cable available
- Suspension & Ceiling mounting
- CCT Turnable



Model NO.	Size	Power	Lumens
L111500-60C0	1500mm	60W	8400
L111500-50C0	1500mm	50W	7000
L111200-40C0	1200mm	40W	5600
L111200-30C0	1200mm	30W	4200
L111200-20C0	1200mm	20W	2800

AC input	220-240V/100-277V 50/60HZ
Light source	2835 SDCM<5(SDCM<3 optional)
CRI	80/90/95
CCT	2700K/3000K/4000K/5000K/6500K
Light efficiency	140Lm/w, 160Lm/w
Beam angle	120°
L70B10/L70B50	@ta 25° C: 72000H/81000H
Size	W65mm*H40mm or W100mm*H40mm