


气囊式膨胀罐

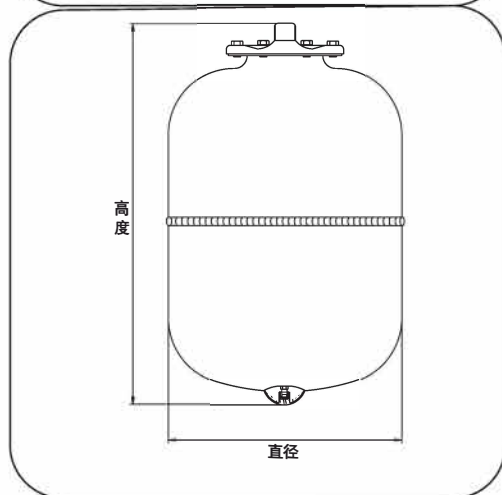

Vasi d'espansione
Expansion vessels
气囊式膨胀罐

VR

Marcati CE secondo la Direttiva PED97/23/CE
CE marked according to Directive

Pressione massima d'esercizio Maximum working pressure 最大工作压力	Pressione di precarica standard Standard pre-loading pressure 预充压力	Temperatura d'esercizio Working temperature 工作温度
8bar(VR 12-18-24-35-50) 10bar(VR 5-8)	1.5bar	-10°C/+100°C
Finitura esterna colore External finish color 外部烤漆颜色	Membrana in gomma Rubber membrane 气囊	
Red/红色 RAL 3000	EPDM	

Utilizzo-Use-Utilisation

Circuiti acqua calda, autoclave di pressurizzazione acqua calda
Hot water circuits, pressurizing surge tanks

Modello Model 型号	Altezza Height 高度 (mm)	Diametro Diameter 直径 (mm)	Imballo Packing 包装尺寸 (mm)	Attacco Connection 接口
VR5	296	160	(Pz8) 350X350X630	3/4"
VR8	316	200	(Pz8) 430X440X670	3/4"
VR12	312	280	(Pz8) 580X580X650	3/4"
VR18	426	280	(Pz4) 460X570X570	3/4"
VR24	485	280	(Pz1) 510X285X285	3/4"
VR35	440	365	(Pz1) 380X400X460	3/4"
VR50	580	365	(Pz1) 380X400X570	3/4"